



LUXURY SEAT HEATER KIT INSTALLATION MANUAL

Installation Instructions for Leather and Cloth Seating

- Read Carefully Before Starting Installation -

Limited Warranty

This Product is warranted to be free from defects in manufacturing and workmanship and is guaranteed to work for three years or 36,000 miles, or whichever occurs first. This Limited Warranty covers the repair or replacement of the seat heater components only and does not cover any costs related to or damage resulting from the installation of the seat heater. Seat heaters must only be used in the seat applications for which they were designed, tested and approved by Check Corporation, and failure to properly install the designated seat heated product, or improper installation or misuse of any component, will void this Limited Warranty. Installer shall indemnify and hold Check Corporation harmless from any and all installations contrary to automobile OEM, automobile dealership, and Check Corporation issued instructions.

MANUFACTURER'S LIMITED REPAIR/REPLACEMENT WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR DUTIES OR WARRANTIES ARISING FROM A COURSE OF DEALING, USAGE OF TRADE OR COMMON LAW. IN NO EVENT SHALL MANUFACTURER BE LIABLE FOR PROXIMATE, INCIDENTAL, CONSEQUENTIAL OR OTHER DAMAGES, INCLUDING BUT NOT LIMITED TO DAMAGES FOR LOSS OF PROFITS OR PRODUCTION OR INJURY TO PERSON OR PROPERTY. THE CONSUMER OF THIS PRODUCT SHOULD CONTACT ITS INSTALLATION DEALER FOR ANY WARRANTY CLAIM AND RETURN WARRANTY CARD TO VALIDATE WARRANTY.

Safety:

PLEASE READ BEFORE INSTALLING HEATING ELEMENT ASSEMBLIES!

[wear gloves]

[wear safety glasses]

⚠ DANGER

- IF ANY OF THE FOLLOWING SAFETY CONDITIONS CANNOT BE MET, DO NOT ATTEMPT PRODUCT INSTALLATION
- Circulation and or sensory compromised persons **SHALL NOT** use this system/product at any time. There is a High Risk of Thermal Burns.
- Never reinstall a heating element. Once the element has been removed it cannot be reappplied to the foam bun. There is a risk of a thermal event
- Check Corporation wire heating element assemblies are specific to each seat and are not to be cut. They are designed to fit specific vehicle seats according to the model and production year of the vehicle. For a full list of vehicles that your kit is compatible with, please call customer service at 877-607-8941.
- Some front passenger seats are outfitted with occupant detection sensors which are not compatible with any after-market seat heater. Consult with Check Corporation to determine the appropriate heating element assembly for each specific vehicle.
- Heating elements should NEVER be installed onto foam where an occupant detection sensor is visible on the top surface of the foam, even if the heating element would not touch the sensor. Heating elements are to be placed onto foam bun only. The heating elements may adversely affect or cause the sensors or airbag system to not function correctly, thereby causing severe injury or death.
- To prevent OVERHEATING AND/OR A FIRE follow these instructions carefully: Cushion and back heating elements are wired to operate in series only. Do not change the wiring to power the heating

elements in parallel.

- If the kit has a cushion and back heating element then both must be used. Never operate cushion or back element separately. Single element heaters are available if needed.
- Release paper must be completely removed. Failing to completely remove paper is a fire hazard and nullifies and voids warranty.

WARNING

- **Do not modify this product.**
- **Do not connect this product to factory seat heater parts**
- Remove paper adhesive liner from the cushion and back heating elements before installing them onto the foam bun. This is mandatory as the heating pattern is maintained by the adhesion of the heating elements to the foam bun of the seat. If the heating elements are not secured they could develop hot spots.
- The Heating elements must NOT be folded into seat listing channels except where cutouts were designed into the element. Do not fold the heating elements against themselves.

CAUTION

- **CLOTH UPHOLSTERY**
If your upholstery is thin, and does not have at least 1/4" of foam sewn onto the backside of the upholstery, it is required that you apply a minimum of 1/4" thick layer of foam to the entire insert area between the heating element and the upholstery. This will eliminate read-through and make sure the temperature is at an appropriate level.

NOTICE

- The heating elements must be connected to switched or keyed ignition power only, to prevent battery drain when vehicle is off.
- Check and determine that the heating elements will fit under the seat trim covers in the desired areas. The listing channels or the Velcro hold-downs should line up with the cutouts in the heating elements. This is not important if the heating elements do not cross over a listing channel or Velcro hold-down.
- **BONDED SEATS (UPHOLSTERY GLUED TO FOAM BUN)**
Never remove the cover of a bonded seat. The cover of a bonded seat cannot be installed again once it has been removed. If installation of a heating element assembly is to be attempted in this kind of seat, cut an opening in the foam bun large enough for the element to fit 1/2" underneath the cover. A professional should only attempt this, as mistakes often result in the replacement of the seat foam and cover.

IN THE EVENT THAT THESE WARNINGS ARE DISREGARDED, THE WARRANTY BECOMES NULL AND VOID. MISUSE OF THIS PRODUCT MAY CAUSE SERIOUS INJURY TO PERSON OR PROPERTY.

- Before You Start -

REVIEW ALL INSTALLATION INSTRUCTIONS AND PRODUCT WARNINGS BEFORE INSTALLATION!

- Seat Heaters Specification -

Check Corporation heating element assemblies are specific to each seat. They are designed to fit specific vehicle seats according to the model and production year of the vehicle.

- 12v automotive system (11 – 15 volts)
- Maximum power requirements vary by kit and range between 51W (3.7A @ 13.8V) and 138 W (10 A @ 13.8V).
- Temperature range measured at seat surface during normal operation **

Luxury (Temp II)	110°F	(+/- 3 °F)	or 43.3°C
Luxury (Temp I)	105°F	(+/- 3 °F)	or 40.6°C

- Heating elements meet FMVSS 302 flammability requirements
- Connectors are indexed to prevent improper mating

** Performance varies with seat materials used and the density and amount of sew foam between the heating elements and the surface of the seat.

- The Skills You Need -

Automotive electrical experience or a basic understanding of electrical systems and the ability to disassemble and reassemble automotive seating is recommended.

Recommended tools:

- Multi-meter, terminal crimpers, wire strippers, screw driver, wrenches, electrical tape, marker or pencil, drill, wire cutters, torque, socket and allen wrenches, hog ring pliers, and utility knife, needle nose pliers, ratchet, deep socket, and 1" step drill bit.

- Parts list - LUXURY SEAT HEATER SYSTEMS

PARTS	TWO SEATS CUSHION & BACK
CUSHION ELEMENT	2
BACK ELEMENT	2
TWIN SWITCH PACK	1
HARDWARE PACK	1
ELECTRONIC CONTROLLER	1
6FT EXTENSION HARNESS	2
OWNERS MANUAL	1
INSTALLATION MANUAL	1

- Parts list - SWITCH PACKS




PARTS	TWIN SWITCH PACK
SWITCH	2
TWIN SWITCH HARNESS	1

NOTE:

The heating elements work best with a ¼" to ½" piece of foam between them and the seat cover material. Thicker foam will increase the heat up time. Normally foam is sewn into the seat cover at the factory.

- Installation -

- 1 Pre-wire all components on your workbench and test with a multi-meter for continuity. Do NOT use a battery charger as a power source. Use a 12V D.C. power source. If there are any problems, see the troubleshooting page. **IF THE KIT HAS A CUSHION AND BACK HEATING ELEMENT THEN BOTH MUST BE USED. NEVER OPERATE CUSHION OR BACK ELEMENT SEPARATELY. CHECK CORPORATION HAS SINGLE ELEMENT HEATERS AVAILABLE IF NEEDED.**
- 2 Locate vehicle fuse panel and determine routing of wire. Look for ignition switched fuses that are 15 Amps or greater. If using relay power harness, see *Relay Power Harness Installation*. Find location for controller and switch. Switch should be mounted on center console, dashboard, seat molding or using an optional switch bracket. Controller could be mounted under center console, or instrument panel. Secure controller with Tie-wraps.
- 3 Disconnect and isolate the negative (ground) battery cable, pump the brakes a few times, and wait five minutes for the system to discharge. It is important to do this before disconnecting any airbag connectors.
- 4 Remove Seat(s) from vehicle. Care should be taken, as the sharp edges of the seat frame will scratch the interior trim. Use duct tape or padding to cover sharp areas before removing seat.
- 5 Remove the seat covers and verify that the heating elements fit. **HEATING ELEMENT ASSEMBLIES SHOULD NEVER BE INSTALLED ONTO FOAM WHERE AN OCCUPANT DETECTION SENSOR IS VISIBLE ON THE TOP SURFACE OF THE FOAM, EVEN IF THE HEATING ELEMENT WOULD NOT TOUCH THE SENSOR.**
- 6 Install the ground wire ring terminal, from the power harness, to the fuse box ground screw. Clean terminals and grounding point of paint, grease, and dirt to ensure a good electrical connection. **NEVER DRILL THROUGH THE FLOOR.**
- 7 Install the seat heater switch with a 5/16" drill bit on the seat molding, the center console, dashboard, or using an optional switch bracket. Ensure that the wire harness will reach the switch and the wires aren't obstructed by the seat structure and supports. **NEVER PUT THE SWITCH IN A POSITION WHERE THE LIGHT FROM THE SWITCH WOULD GLARE INTO THE DRIVER'S OR OCCUPANT'S EYES.**
- 8 Locate area for heating elements by tracing element outline onto foam bun. Be sure that the cushion element is placed on the cushion bun, and that the back element is placed on the back bun.
- 9 Remove the adhesive release paper. This paper must be removed, as IT WILL BURN. Attach the heating elements to the foam bun (not the seat cover) by pushing down on the pads causing the adhesive to stick completely to the foam bun. **NOTE:** Element may be hard to handle if you tear release paper off all at once. Paper can be peeled away in increments as you apply the element to the foam bun. Apply cushion element rear to front and back element bottom to top. **RELEASE PAPER MUST BE COMPLETELY REMOVED. FAILING TO COMPLETELY REMOVE PAPER IS A FIRE HAZARD AND VOIDS WARRANTY.**
- 10 Re-install seat trim covers. Do not install hog rings through the heating element. **THE SEAT LISTING WIRES SHOULD NOT LIE DIRECTLY ON TOP OF THE HEATING ELEMENTS. IF THE LISTING WIRES MUST CROSS THE PADS IN THE CHANNELS, ADD SOME FOAM FOR PROTECTION.**
- 11 Install the seat into the vehicle. Reconnect airbag connectors and then the ground of the battery. Connect the extension harnesses to the controller as shown in the wiring diagram. Remove the fuse that was located in step 2, and reconnect using the supplied fuse adapter. Only one module per fuse adapter. ***SEE FUSE INSTALLATION***
- 12 Mate all remaining connectors (as shown in the wiring diagram). **SECURE THE WIRE WITH THE TIES PROVIDED. CHECK THAT THE RECLINING OF THE SEATS, OR THE MOVEMENT OF THE SEAT FRAME DOES NOT PULL, FRAY, OR CUT THE WIRES**
- 13 **TEST SEAT FUNCTIONS; RECLINE, FORWARD, REVERSE, UP, DOWN, ETC. MAKING SURE THAT NO STRAIN IS PLACED ON ANY OF THE SYSTEM'S WIRES.** Make sure all of the anchor bolts are tight to the manufacturer's specification.
- 14 **OPERATION OF THE HEATED SEATS:** After turning the system on, you must sit in the seat and should be able to feel heat within 1-5 minutes depending on the thickness of the trim cover material over the element. The thicker the trim cover, the longer it takes to feel the heat.

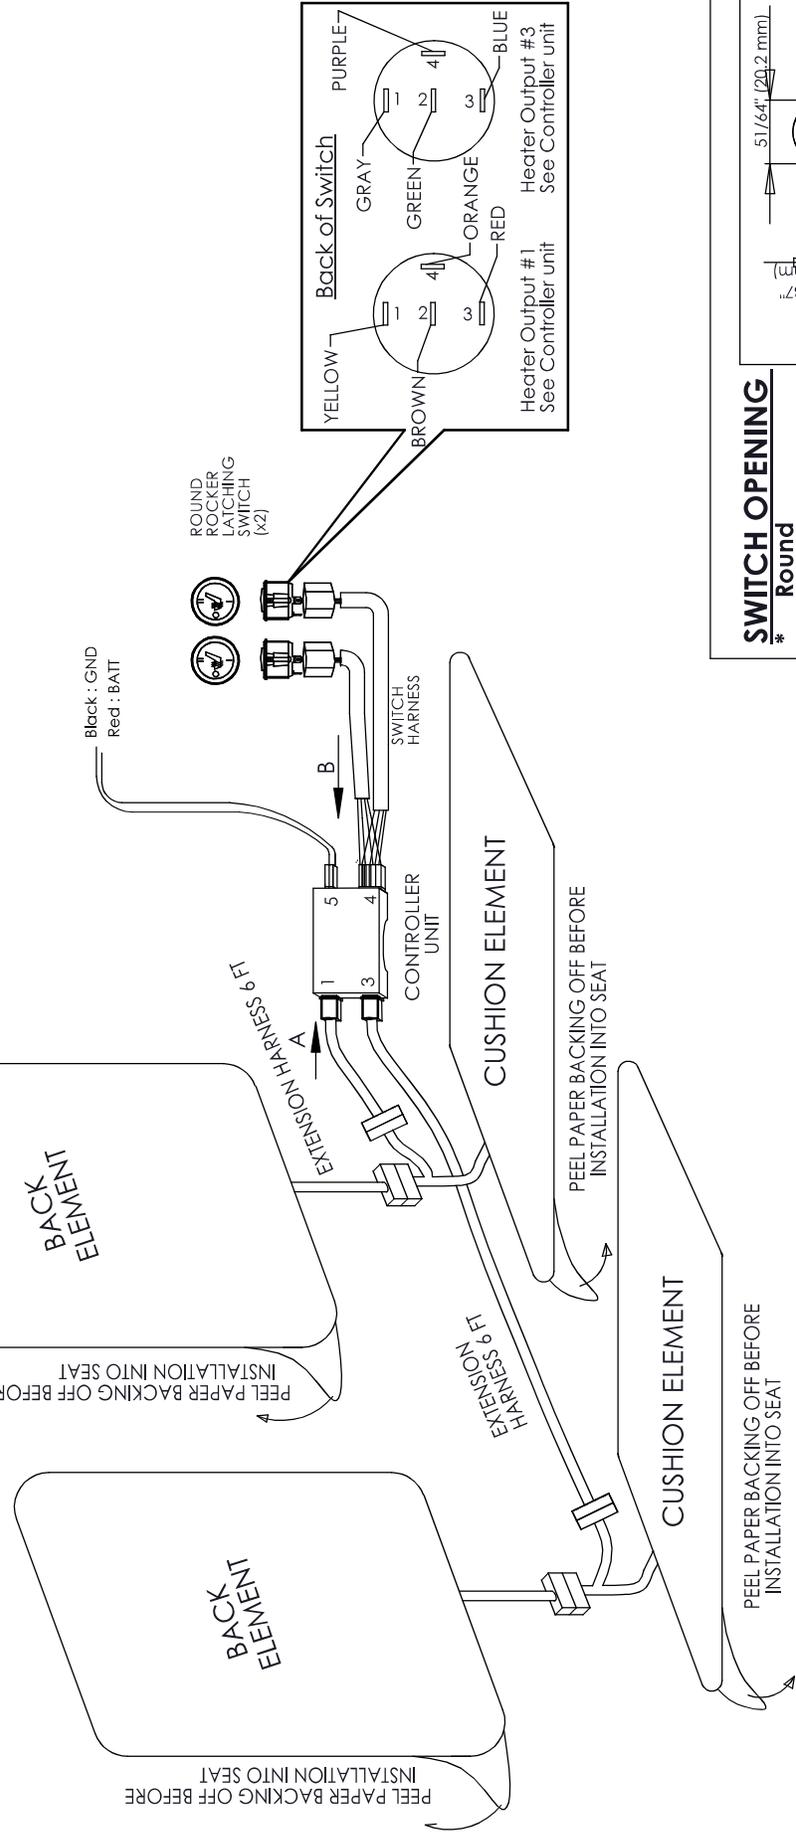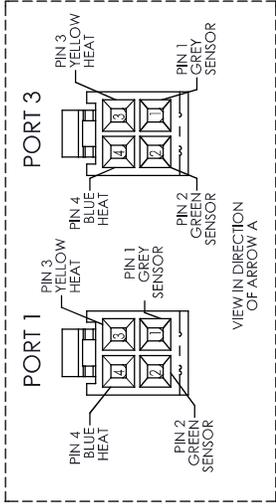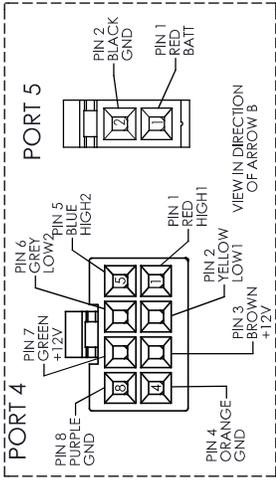

LUX-MXXX HI-LO HEATER KIT WIRING DIAGRAM

- Relay Power Harness Add On Installation (LUX-xxx) -



Figure 1

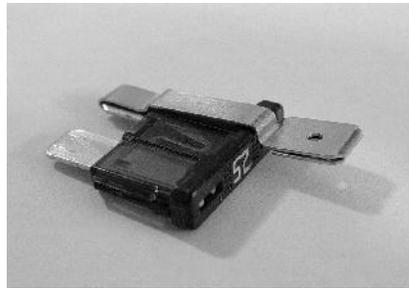


Figure 2



Figure 3




Figure 4




Figure 5




Figure 6

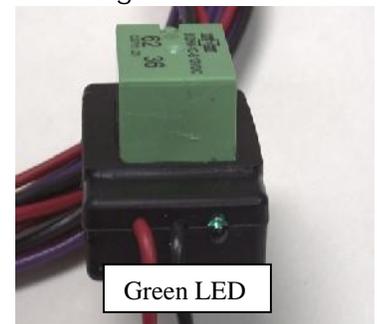


Figure 7

- 1) Locate interior mounted fuse that supplies the 12V Power Sockets (i.e. used for cell phone, cigarette lighter, etc). If this fuse does not exist in the interior, skip to step #3.
- 2) Remove fuse from fuse holder. Using test light or voltmeter, determine which side of fuse holder is “hot” and which is “cold”. The “hot” side will have 12V when vehicle is running. The “cold” side will not (until fuse is re-inserted). Attach fuse tap to “cold” side of fuse. Re-insert fuse into fuse holder. See Figures 2 & 3.
- 3) If fuse is not located in interior, you can access “cold” side of fuse by splicing the 12V wire running in back of the Power Socket. See Figure 4.
- 4) Determine if 12V Power Socket is constantly powered or switched with ignition. If switched, 12V will disappear from fuse and socket when vehicle is off and ignition key is removed.
- 5) If Power Socket is constantly powered, attach **ONLY** the red wire to cold side of fuse (see Figure 5). Find a switched fuse/power line for the purple wire. Avoid safety related circuits. Purple wire can be connected to low amperage fuses. Be sure to connect purple wire to “cold” side of switched fuse.
- 6) If Power Socket is ignition switched, attach **BOTH** purple and red wires to fuse tap on “cold” side of fuse (see Figure 6).
- 7) Connect black wire to ground. A ground ring terminal and ground screw have been included.
- 8) If all connections are proper, green LED will light only when vehicle is running (See Figure 7).
- 9) Plug white connector into control module.

- Troubleshooting of the Electrical System -

If the system does not heat up, check the following:

To test the unit you must sit in it for at least a 5-minute period in which the heat has time to reach the seat surface.

- Check the fuse utilized to power the system.
- Ensure that all connections are properly mated and that the 12V DC and ground wires are properly installed. (See wiring diagram)

If the heating elements, switch, and seat harness test OK, then a power problem exists, check the following:


- Using a multi-meter or a test light, start at the fuse adapter and trace back through all of the connectors and the switch to determine where the power loss is occurring. Repair as necessary.

If the fuse continues to fail, check the following:


- Each pair of heating elements that are installed in the vehicle must have their own fuse.

IF YOU HAVE ANY QUESTIONS REGARDING THE INSTALLATION OF CHECK CORPORATION SEAT HEATERS, PLEASE CALL OUR HOTLINE AT 1-800-927-6787, 8AM TO 5PM EASTERN STANDARD TIME.

- Troubleshooting (Figures) -

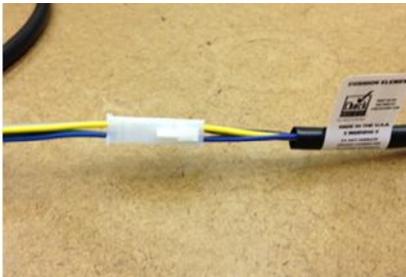

1) This is the 4 Pin connector at the end of the element harness. Disconnect the wire harness and use a multi-meter to check for continuity.

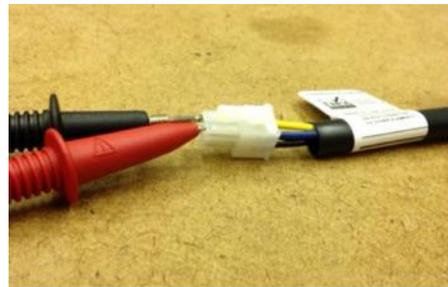

2) Set the multi-meter to ohms, and touch the red and black probes to the yellow and blue pins. The meter should show that there is continuity through the heating wire; if it does not, there is a break in the heating wire.



3) The listing channels or the Velcro hold-downs should line up with the cutouts in the heating elements. Seat heater adheres 100% to the foam bun following the surface into the listing gaps. Opening in heater is aligned with gap.

